


# 96 Port Wall Mount Enclosure

## Fiber Splicing & Termination Panel Ultimate Serviceability and Manageability

OptoSpan's WM-96 Wall Mount Termination and Splicing Enclosures provide a convenient, secure and organized housing for fiber optic connections and terminations, as well as a central point for splicing fiber optic cables for indoor or outdoor installations.

The WM-96 Wall mount fiber enclosures are frequently employed in a diverse range of applications, including data centers, telecommunication rooms, fiber-to-the-home (FTTH) installations and enterprise networks. These wall mount fiber termination enclosures are crucial to keeping fiber optic networks running smoothly and efficiently because of the roles they play in organizing and safeguarding fiber optic connections. This WM-96 patch panel has two sections for fiber optic cable entry and exit. It can be pre-configured with up to eight (8) MTP-LC cassettes, up to ninety-six (96) pass-through LC, SC, ST, or FC adapters, and up to ninety-six (96) fiber splicing capacity. This wall-mounted patch panel includes cable management accessories, including cable ties, cable clips, and a grid label sticker, to support and organize cables, thereby reducing the risk of damage or tangling.

Splice trays, pigtails, and multi-fiber (MTP/MPO) cables are available as optional accessories and can be pre-configured for use with this panel.

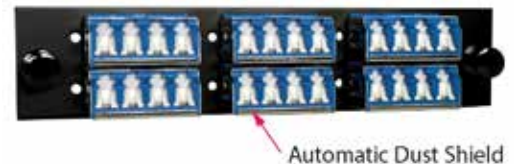

### Exclusive Feature:

#### IP5x Rated LC Adapter Panels with Automated Dust Shield

Select Series Patch Panels feature OptoSpan's exclusive LC Adapter Panels with and IP5x compliant 100% automated dust shield to keep the LC connectors clean and prevent network failures. No Dust Caps Required!

*"The leading cause of packet corruption and link downtime in the fiber optic network are the contaminated connectors."*

### Key Features and Benefits:

<b>Key Locks</b>	Key locks included for both, the splicing, and the patching compartment
<b>Splice and Termination Enclosure</b>	Flexibility of cable termination or splicing in a single panel
<b>Modular Design for up to 8 Cassettes, Adapter Panels or Splice Trays</b>	Offers a compact, flexible, and modular solution for a variety of pre-terminated cables
<b>Compatible with full line of OptoSpan HD Series Cassettes and Adapter Panels</b>	Choose from the OptoSpan HD Series modules, such as eight (8) MTP-LC cassettes, eight (8) 12F pass-through LC, SC, ST, or FC adapter panels, or six (6) Splice Trays
<b>Compatible with OptoSpan Armored and Non-Armored Cables</b>	Simple to integrate this panel with SteelFlex and SteelPatch Armored and Non-Armored cables, enabling reliable networks
<b>Compatible with OptoSpan Cable Glands</b>	Offers a method for cable entry and exit as well as stress relief



<b>16 Gauge Aluminum Body with Beige Polyester Powder Coat</b>	Dependable and robust fiber optic network
<b>20 Gauge Aluminum Splice Trays</b>	Rugged splice chip that is pre-installed and ready for fusion, mechanical, or ribbon splicing
<b>Double Doors</b>	Double doors offer security and convenience
<b>Dedicated Compartments and Trays</b>	Protects delicate fiber splices as well as separate entry and exit cables
<b>Spacious Interior Sections</b>	Facilitates field access and installation
<b>Rubber Entrance Ports</b>	Cable entry ports are simple to open and close when installing cable glands for strain relief
<b>Included Cable Management Accessories</b>	Improve the identification and upkeep of cables and connectors
<b>Made in USA</b>	Made in the USA from the highest quality components to assure years of dependable use



Splice Trays

**Dimensions:** 16.8"L x 17.3"W x 6"D (13lbs)

**Cable Entry Ports:** (8) 1 1/2" cable entry ports (4 Top, 4 Bottom)

**Maximum Capacity:**

MTP-LC Cassettes: Qty. 8 (12F) High Density MTP-LC Cassettes

Termination (Pass-through): Qty. 8 (12F) High Density Series Adapter Panels. MPO, LC SC, ST, FC pass through options available..

Splicing: Qty. 8 (12F) High Density Series LC, SC, ST or FC Adapter Panels with Pigtails and Qty. 6 12F/24F Splice Trays

OptoSpan WM Series Panel Specifications and Max Capacity									Pre-Terminated Fiber Cable Compatibility with WM Series Panels			
Model	# Slots	Max. Fibers	# HD Series Cassettes	# HD Series Adapter Panels	# Splice Trays	# Entry Ports	Entry Port Size	Cable Glands for Entry Ports	SteelFlex Armored	SteelPatch Armored	MTP/MPO 12F - 144F	Breakout LC/SC/ST/FC
	Incl.	Incl.	Opt.	Opt.	Opt.	Incl.	Incl.	Opt.	Opt.	Opt.	Opt.	Opt.
WM-48	4	96	4	4	4	4	1 1/2"	✓	✓	✓	✓	✓
WM-96	8	192	8	8	6	8	1 1/2"	✓	✓	✓	✓	✓
WM-144	12	288	12	12	6	8	1 1/2"	✓	✓	✓	✓	✓
WM-288	24	576	24	24	12	8	1 1/2"	✓	✓	✓	✓	✓

